

JETMARK II PRO TRAVERSER SMART



EXTEND- RETRACT

The JETMARK II PRO SMART Traverser is a family of short-range motion devices for inkjet printing applications over stationary product. Print head mounts are offered as in line or extend-retract. The end adapter can accommodate CIJ, HP cartridge or other DOD printers. The unit is available in stroke lengths of 9-18". The traverse speed is adjustable from 0-12"/sec. The JETMARK II PRO is actuated by any dry contact closure. When activated the controller will provide a 0-30VDC output trigger to the inkjet printer and start the in-out motion. The trigger will be held on until the end of the return stroke. The system comes complete with an 18" adjustable mounting stand, motion actuator, controller, 12' print trigger cable, and foot switch with a 6' cord. An advance PLC controller with color HMI is included to offer a wide range of control options.





**AUTOMATION
PLUS**

AUTOMATION-PLUS, INC.
3409 W. HARRY ST. WICHITA, KS 67213
PH: (316) 946-9988 FAX: (316) 946-0075



SPECIFICATIONS

VOLTAGE

- 115/230VAC 50-60 Hz

POWER

- 220 WATTS

STROKE

- 9 -15"

SPEED

- 0-12"/SEC

INPUT


- DRY CONTACT
- 0-30VDC (OPTIONAL)
- ADDITIONAL INPUTS

OUTPUT





- DRY CONTACT (OPTIONAL)
- 0-30VDC OPEN COLLECTOR
- BIDIRECTIONAL PRINT
- ENCODER PULSE OUTPUT
- COLOR OPERATOR INTERFACE
- MULTI PRINT FUNCTION
- MESSAGE SELECT
- ADDITIONAL OUTPUTS



AUTOMATION-PLUS, INC.
3409 W. HARRY ST. WICHITA, KS 67213
PH: (316) 946-9988 FAX: (316) 946-0075

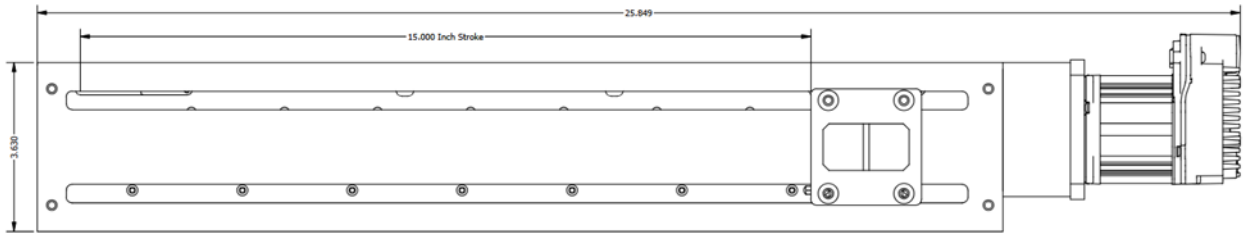

INLINE

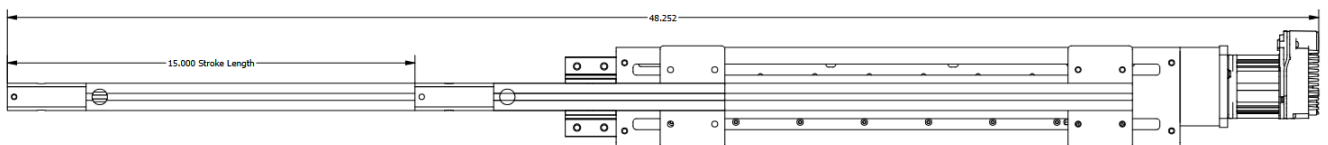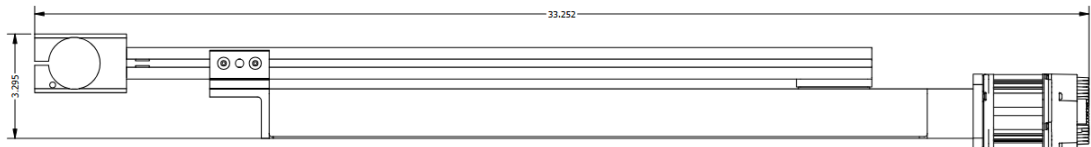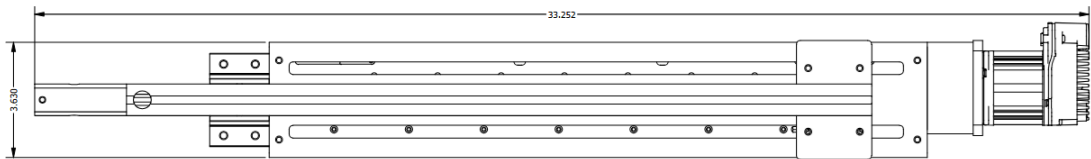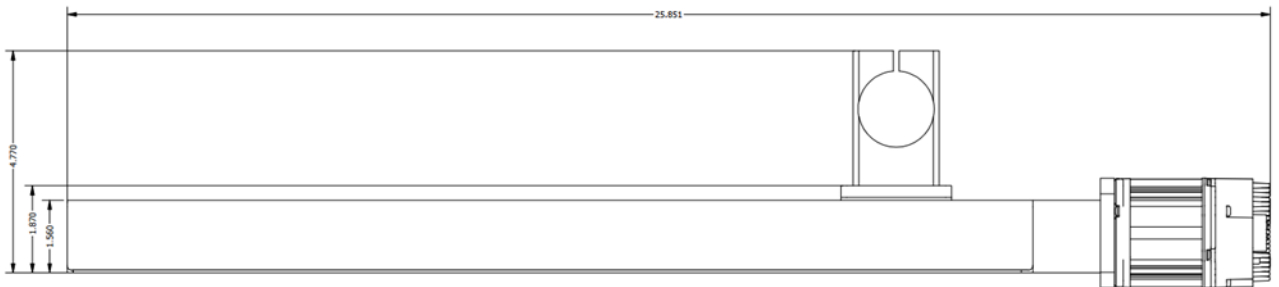

EXTEND-RETRACT