

JETMARK ULTRA TRAVERSER



Automation-Plus offers a number of accessories for marking single or multilane packages where product motion does not allow the use of stationary printing devices. Our traversers can be used with CIJ, DOD, TTO, and TIJ printers. For High speed, single print head motion we offer the JETMARK ULTRA. The JETMARK ULTRA is a belt driven axis controlled by a closed loop servo motor. The unit is constructed of aerospace grade aluminum coated with a Cerakote TM anti corrosion coating. All fastener and guards are stainless steel. A multitude of mounting configurations are available from cantilever to foot mount.. The controller can be selected to match the applications. From Single print direction with single print trigger to Dual print direction with up to 12 independent triggers and multiple program storage.

Equipment Specifications

- Traverse Length to 48"
- Max Speed 200 fpm
- Power 120Vac 4 Amps
- Mounting Configured for Machine Type and Location

Standard Control Features

- Isolated Relay Start Input 24Vdc
- Touch screen HMI unit for data entry
- PLC control
- Contact Output for Unit Ready, and cycle Complete
- Contact Output for Machine Fault
- 3-30Vdc Isolated Printer Trigger
- 3-30Vdc Isolated Encoder pulse output



Optional Features

- Bi directional print with 3-30Vdc reverse signal
- 3-30Vdc Isolated Encoder pulse output
- 12 independent print trigger positions forward and reverse
- 10 program storage




**AUTOMATION
PLUS**

AUTOMATION-PLUS, INC.
3409 W. HARRY ST. WICHITA, KS 67213
PH: (316) 946-9988 FAX: (316) 946-0075

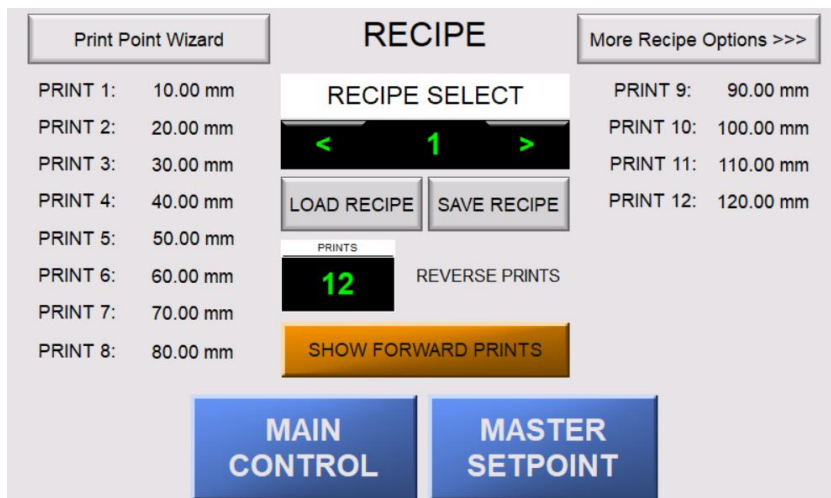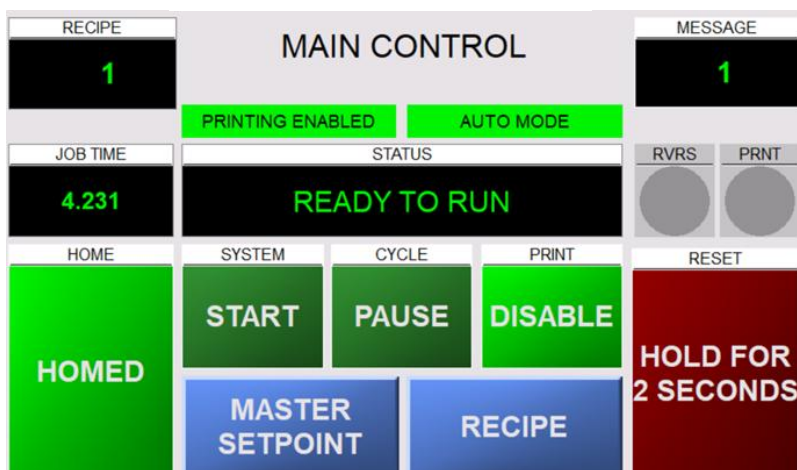





SERVO DRIVE DUAL HEAD

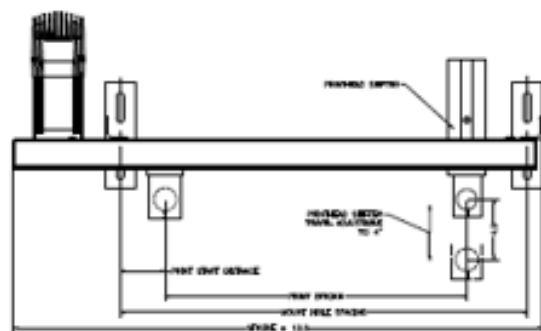


HORIZONTAL PNEUMATIC SHIFTER

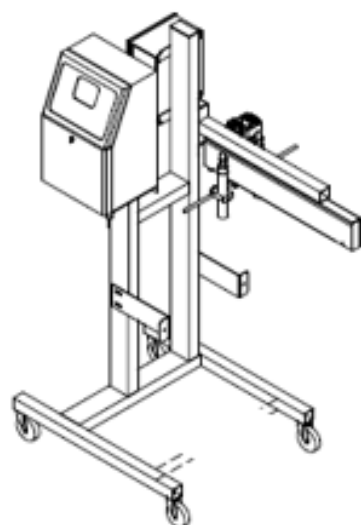

MOBILE MOUNT WITH PRINTER

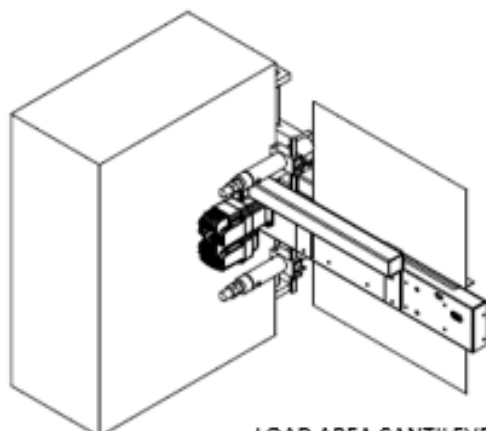

LOAD AREA CANTILEVER
MOUNT WITH FILM GUIDE

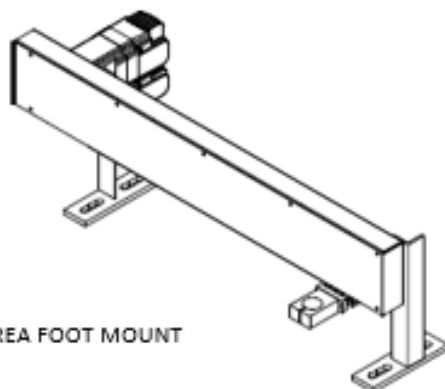

UNLOAD AREA FOOT MOUNT